

FAST* *SIGNS®

More than fast. More than signs.®

Digital Signage Overview



M-Series



PF-Series
Tabletop



L-Series



O-Series

M-Series

Commercial Grade LCD Displays

The M-Series comes with your choice of integrated media player and software to ensure a quick and easy installation as well as longevity and ease of use.

- 24/7 use with remote management ensures you can connect with your customers around the clock
- Built In HS 144 BrightSign Player
- Content Management Software comes pre-installed.
- Best Use Examples: Building Directories, Menu Boards, Wayfinding



DIRECTORY

ANGEL GROVE CLINIC



DEPARTMENT	FLOOR	STAFF
ORTHOPEDICS	FIRST FLOOR	ZACHARY TAYLOR (M.D.) ASHLEY HAMMOND (M.D.) CASSIE CHAN (M.D.)
PEDIATRICS	FIRST FLOOR	KIMBERLY HART (M.D.) CARLOS VALLERTE (M.D.) TANYA SLOAN (M.D.)
OBSTETRICS	FIRST FLOOR	JASON SCOTT (M.D.) ADELLE FERGUSON (M.D.) LEO CORBETT (M.D.) DAMON HENDERSON (M.D.) KENDRIX MORGAN (M.D.) MIKE CORBETT (M.D.)
DERMATOLOGY	SECOND FLOOR	BILLY CRANSTON (M.D.) KAI CHEN (M.D.) JOEL RAWLINGS (M.D.)
RADIOLOGY	SECOND FLOOR	FARKAS BULKMEIER (M.D.) EUGENE SKULLOVITCH (M.D.) KATHERINE HILLARD AISHA CAMPBELL ADAM PARK ROCKY DESANTOS
VIROLOGY	THIRD FLOOR	TRINI KWAN (M.D.) JEROME STONE (M.D.) T.J. JOHNSON (M.D.)
GENERAL SURGERY	THIRD FLOOR	TOMMY OLIVER (M.D.) DANA MITCHELL (M.D.) ANGELA FAIRWEATHER (M.D.)

2019 Award of Excellence
ANGEL GROVE CLINIC

Thank you to our amazing expert staff!

M-Series

SPECS

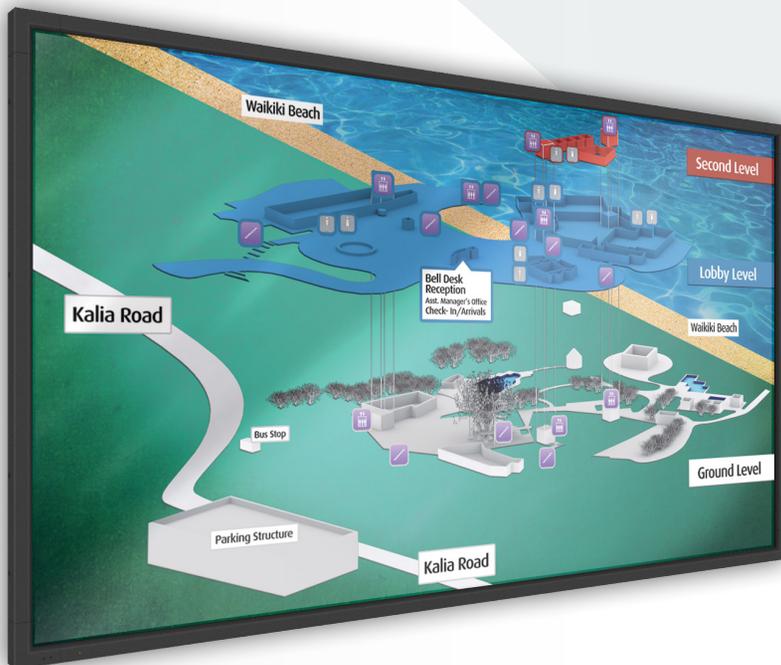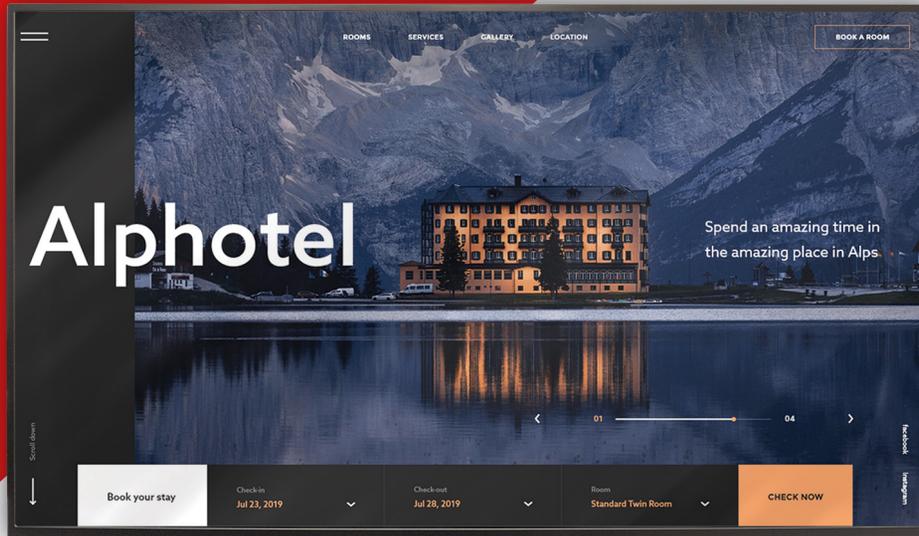


Resolution	1920 x 1080
Aspect Ratio	9:16
Contrast Ratio	1,100:1
Input Power Voltage	AC 100-240V (50Hz-60Hz)
Power Consumption	80W
Viewing Angle	178°
Panel Life	16,000 hours
Brightness	450 cd/m2
Working Temperature	32° to 122° F
Colors	16.7M
Accessories	Remote Control, Power Cable
Media Center	BrightSign

L-Series

Freestanding Kiosk

Perfect for up-close, high-impact messaging, our all-in-one digital kiosks feature eye-catching images within sleek and slim designs, great for grabbing attention in busy, high-traffic areas.

- Can operate in a single area or be moved to different locations.
- Built In HS144 BrightSign Media Player
- Content Management Software comes pre-installed.
- Best Use Examples: Virtual Concierge, Business Communications, Loyalty Program Enrollment

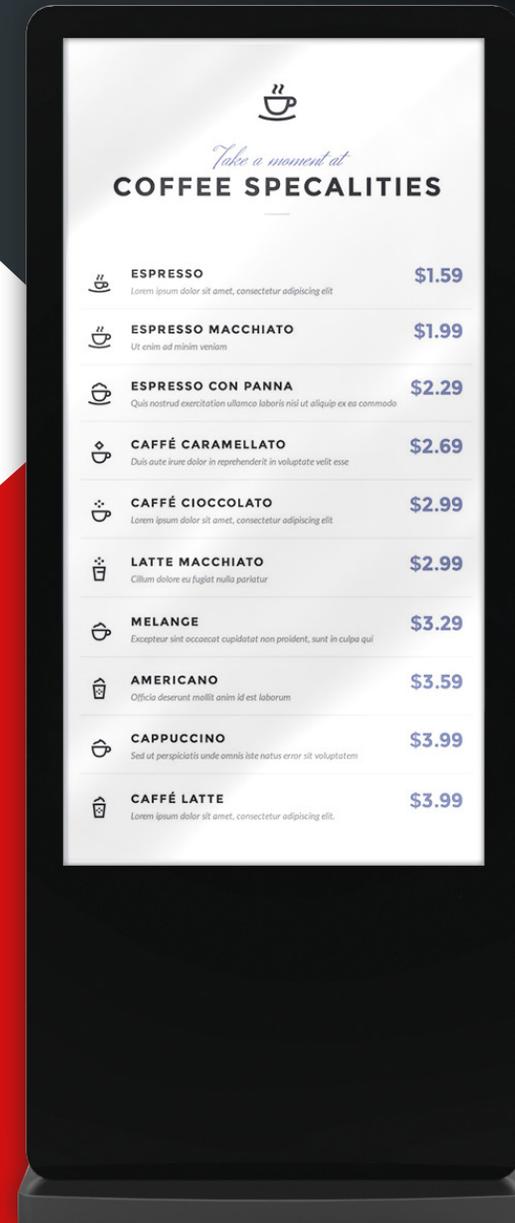

Take a moment at COFFEE SPECIALITIES		
	ESPRESSO <small>Lorem ipsum dolor sit amet, consectetur adipiscing elit</small>	\$1.59
	ESPRESSO MACCHIATO <small>Ut enim ad minim veniam</small>	\$1.99
	ESPRESSO CON PANNA <small>Quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo</small>	\$2.29
	CAFFÉ CAMELLATO <small>Duis aute irure dolor in reprehenderit in voluptate velit esse</small>	\$2.69
	CAFFÉ CIOCCOLATO <small>Lorem ipsum dolor sit amet, consectetur adipiscing elit</small>	\$2.99
	LATTE MACCHIATO <small>Cillum dolore eu fugiat nulla pariatur</small>	\$2.99
	MELANGE <small>Excepteur sint occaecat cupidatat non proident, sunt in culpa qui</small>	\$3.29
	AMERICANO <small>Officia deserunt mollit anim id est laborum</small>	\$3.59
	CAPPUCCINO <small>Sed ut perspiciatis unde omnis iste natus error sit voluptatem</small>	\$3.99
	CAFFÉ LATTE <small>Lorem ipsum dolor sit amet, consectetur adipiscing elit</small>	\$3.99

L-Series

SPECS



Resolution	1920 x 1080p
Aspect Ratio	9:16
Contrast Ratio	3,000:1
Input Power Voltage	AC 100-240 V (50Hz - 60Hz)
Brightness	450 cd/m2
Working Temperature	32° to 122° F
Sound	6W, 8Ω
Colors	16.7M
Touch Type	Infrared
Touch Points	10 Points
Touch Objects	Finger, Touch Pen, Non-Sharp Objects
Viewing Angle	170°
Power Consumption	65W
Accessories	Remote Control, Power Cable
Media Center	BrightSign

Outdoor Series

The all-in-one, robust design of our O Series signage makes it easy to install, perfect for your customer's needs. These outdoor displays can handle most environments and its high brightness will capture your customer's attention, even under direct sunlight.

- BrightSign Media HD1024 built-in case and software included
- P56 environmental rating to ensure protection and longevity.
- At 3500 nit brightness, our displays will look great in just about any lighting conditions
- Viewable with polarized sunglasses

SPECS

Resolution	1920 x 1080p
Brightness	3500 Nits
Contrast Ratio	3,000:1 (Static) 1,00,000:1 (Dyn.)
Light Life Time	100,000 hrs (Typ.)
Operating Temperature	-40°F - 122°F
Storage Temperature	-40°F - 140°F
Humidity	10% ~ 80% RH Non-Condensing
Certification	CE/FCC/ROHS
Colors	16.7M
Viewing Angle	178° / 178°



PF Series

Tabletop and Retail Series



Built for high-traffic locations, our retail displays have your choice of integrated media player and software to ensure a quick and easy installation as well as longevity and ease of use.

- 24/7 use with remote management ensures you can connect with your customers around the clock.
- Built In Media Player – HS144 BrightSign
- Content Management Software comes pre-installed.
- Best Use Examples: Bar Top Advertising, Visitor Management, Contact Form Entry.

SPECS

Resolution	1920 x 1080p
Brightness	3500 Nits
Aspect Ratio	16:9
Contrast Ratio	3,000:1 (Typ.)
Input Power Voltage	AC 100-240 V (50 Hz - 60Hz)
Sound	2W, 8Ω
Accessories	Remote Control, AC Power Cord, CD, Key, User Manual
Media Player	HS144 BrightSign
Working Temperature	-40°F - 122°F
Colors	16.7M
Viewing Angle	178°
Light Life Time	100,000 hrs (Typ.)



Retail



Tabletop

***FAST*SIGNS**[®]

More than fast. More than signs.[®]

**3615 14th Street West
Bradenton, FL 34205**

941-243-3947